



## 86" Android Based Interactive Flat Panel Displays

### Key Features



#### Palm Erase

Automatic palm erasing function allows teachers and students to simplify the white board experience with smooth writing and erasing.



#### Ease of use with Android

Android gives teachers one touch access for lessons and collaboration tools including whiteboard, web browser, apps library, and native wireless screen sharing.



#### Wireless Presentation

Teachers, students or any user can share their screen efficiently and conveniently in the classroom or meeting room via EShare application. This application can connect any operating system and show up to 4 different screen at the same time.



#### Different Sizes for various classrooms

Available in a variety of large screen sizes, the IFD range gives customers the options to choose exactly what they need for their room size.



#### Crestron Connected

Crestron Connected certification complements VESTEL's presence with inside the corporate, retail, government, better training and hospitality markets, all of which use expert AV controls. As those sectors hold to evolve with growing necessities for simple-to-use merchandise, seamless integration, dependable answers and community connectivity.

## DISPLAY

|                          |   |
|--------------------------|---|
| Screen Size              | 86"   |
| Panel Technology         | IPS   |
| Backlight Type           | Edge-Type LED                                   |
| Brightness (typical)     | 400 cd/m <sup>2</sup>                           |
| Native Resolution        | UHD: 3840 x 2160 - HDR10                        |
| Contrast Ratio (typical) | 1200:1  |
| Dynamic Contrast Ratio   | 50000:1   |
| Panel Life Time ( Min. ) | 30000 Hrs                                       |
| Response Time (typical)  | 8 ms  |
| Active Area (H x V)      | 1907 x 1076 mm                                  |
| Pixel Pitch (H x V)      | 0.4935 x 0.4935 mm                              |
| PPI (pixel per inch)     | 52  |
| Viewing Angle            | 178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10 |
| Color Value              | 1.07 B (10-bit)                                 |
| Screen Treatment         | 2H  |
| Haze Level               | 8%  |
| Refresh Rate             | 120 Hz  |
| Front Type               | Black Touch Bezel Type                          |
| Orientation              | Horizontal                                      |
| Operation Hours          | 16/7  |
| Area of Usage            | Indoor  |

## BUILT-IN SYSTEM

|                 |           |
|-----------------|-----------|
| Mainboard Model | 17MB135VS |
|-----------------|-----------|

## REAR I/O

|                  |  |
|------------------|--|
| RGB Input        | VGA(DE-15F)                                      |
| RGB Output       | N/A  |
| Video Input      | 3xHDMI2.0, 2xUSB2.0, USB2.0(Internal), 1xMicroSD |
| Video Output     | HDMI2.0  |
| Audio Input      | Line In L/R                                      |
| Audio Output     | Headphone, Optic SPDIF                           |
| External Control | RS232(DE-9F), 2*Ethernet(RJ45), Service(RJ12)    |
| External Sensor  | RJ12   |

## TOUCH INTERACTIVITY

|                          |   |
|--------------------------|---|
| Type of Touch Technology | Infrared (IR) Technology  |
| Continuous Touch Points  | 10 Points   |
| Sensitivity              | Any touch with finger, gloved hand or pointer   |
| Connectivity             | HID, TUIO, Flash  |
| Compatibility            | Windows <sup>®</sup> 7, Windows <sup>®</sup> 8, Windows <sup>®</sup> 10, Vista, XP, Mac <sup>®</sup> OS, Linux, Android |
| Orientation              | Landscape support   |
| Calibration              | No need   |
| Accuracy                 | %90 <   |
| Reporting Rate           | Up to 450 fps   |
| Glass Type               | Anti Glared (AG), 4mm Tempered  |
| Frame Rate               | up to 450 fps   |
| Communication            | USB 2.0   |
| Power Supply Mode        | USB   |
| Supply Voltage           | DC 5V +/- 5%  |
| Average Current          | <400mA  |
| Response Time            | <10ms   |
| Touch Accuracy           | +/-2mm (over 90% area)  |
| Touch Durability         | Unlimited   |
| HID Compatibility        | Yes USB   |
| Object Sizes for Touch   | 5mm   |

## MECHANICAL

|                            |                        |
|----------------------------|------------------------|
| Product Dimensions (WxDxH) | 1975 x 103 x 1146 mm   |
| Package Dimensions (WxDxH) | 2163 x 318 x 1405 mm   |
| Product Weight             | 90.5 kg                |
| Package Weight             | 110.6 kg               |
| Vesa Mounting              | 600 x 400 mm           |
| Bezel Width                | B:38  T:38   L/R:38 mm |

## ENVIRONMENTAL CONDITIONS

|                       |             |
|-----------------------|-------------|
| Operating Temperature | +40°C / 0°C |
| Operating Humidity    | 90%         |

## POWER

|              |                   |
|--------------|-------------------|
| Power Supply | 110 VAC - 240 VAC |
|--------------|-------------------|

## POWER CONSUMPTION

|              |       |
|--------------|-------|
| Typical      | 280W  |
| Deep Standby | ≤0.5W |

## FEATURES

|                     |  |
|---------------------|--|
| Main Features       | USB-Autoplay, Auto-switch on Failover, Control Button Lock, HDMI Wake-Up   |
| Mechanical Features | IR Touch, Joystick, IR Extender Support, Rocker Switch, Detachable power cable, Carrying handles, Detachable logo positioning, Cable Holders |
| Optional Features   | OPS Compliance   |
| Speaker             | 2 x 12 W   |

## ACCESSORY

|          |   |
|----------|---|
| Standard | QSG, IB, Power Cord, Remote Control Unit, RC Battery, Mounting Kit, Extension Brackets, IR Extender Cable |
|----------|---|


## CERTIFICATION


|        |     |
|--------|-----|
| Safety | YES |
| EMC    | YES |

CE  
Reability Approval

YES  
YES

86990 DS

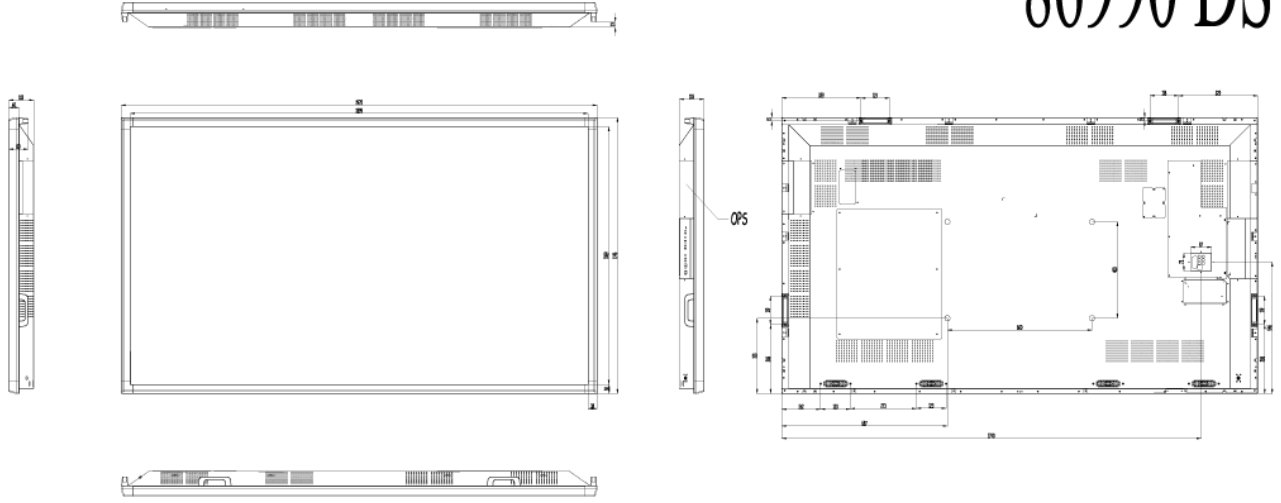

| MODEL<br>86900 DS                   | TV DIMENSIONS (mm)<br>TV ÖLÇÜLERİ |                         |                           | ACTIVE CELL DIMENSIONS<br>AKTİF GÖRÜNTÜ ÖLÇÜLERİ                                    | DIMENSIONS TOLERANCE +/-1 mm<br>GENEL ÖLÇÜ TOLERANS +/-1 mm |
|-------------------------------------|-----------------------------------|-------------------------|---------------------------|---|---|
|                                     | WIDTH<br>GENİŞLİK<br>mm           | DEPTH<br>DERİNLİK<br>mm | HEIGHT<br>YÜKSEKLİK<br>mm |   |   |
| PRODUCT DIMENSIONS<br>ÜRÜN ÖLÇÜLERİ | 1975                              | 103                     | 1146                      |  |   |
| PRODUCT BOX<br>KUTU ÖLÇÜLERİ        | 2163                              | 318                     | 1405                      |   |   |